### How It Works - Complete Your Project in 2 Easy Steps

### **Use Layout Planner**

Use our Layout Planner to measure and draw out your space to determine the amount of balustrade you require.



### **Select your Style**

- Horizontal Tube
- Cable
- Glass
- Side Wall Mount Handrail

### **Select your fixing Options**

- Post fix
- Thread fix
- Side fix
- Core drill

### Select your installation


- Staircase & Landing
- Balconies
- Side Wall Mount Handrail


Custom designed orders to be forwarded by email to: sales@ezrails.co.za


### How the systems works


By using separate area sections within the drawing pad in order to make easy quote reference to supply & Installation process. <u>Example:</u> Main staircase and landing area, and Balconies can have many different areas to your project. Please do not over clutter the drawing pad by adding all the areas on 1 drawing pad.

The system is fully automated to calculate all your balustrade supply items by only using the tools to determine accurate layout and supply.

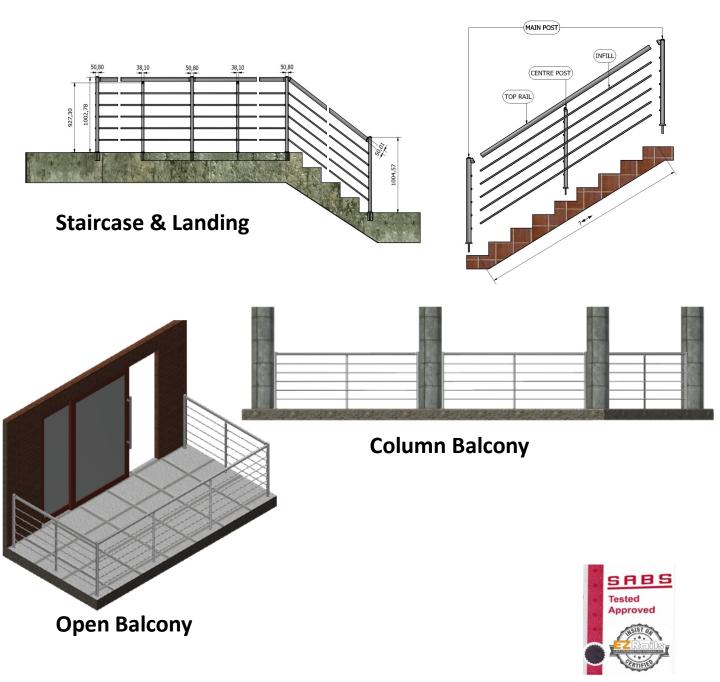

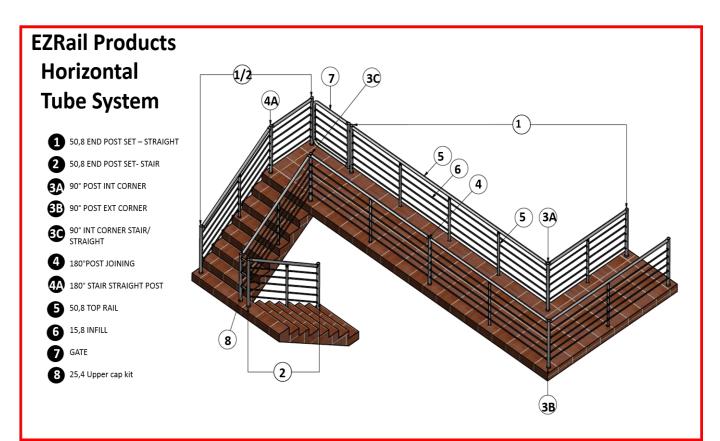

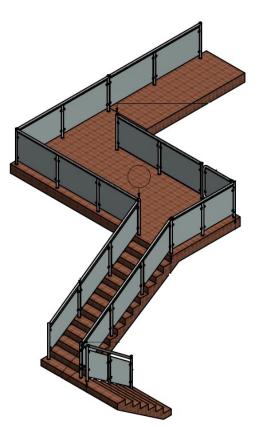

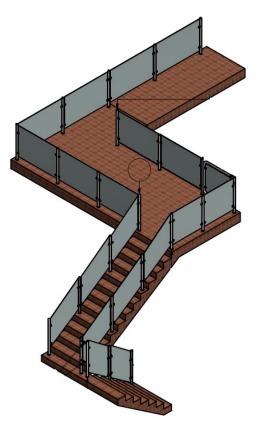



Glass System without Top Rail




**Glass System with Top Rail** 

# **Glass Post Pool Enclosure**

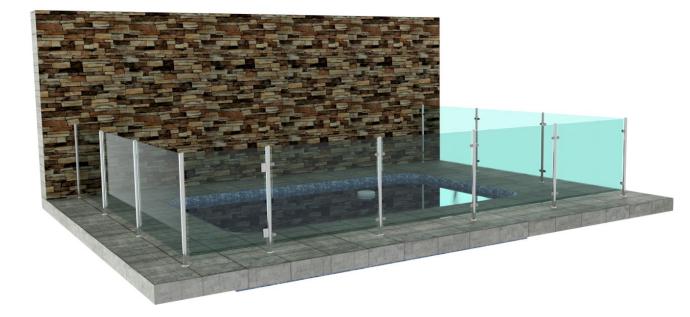

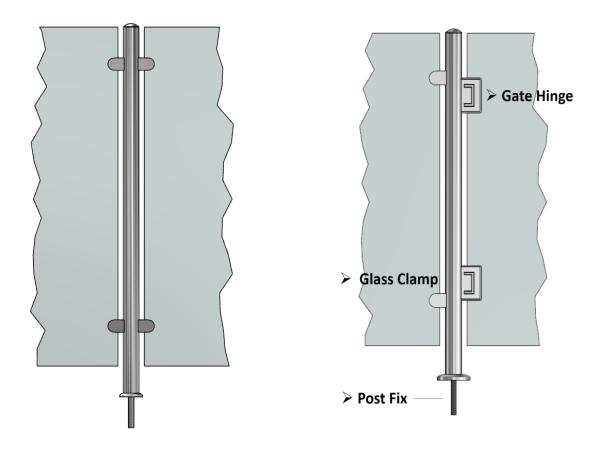

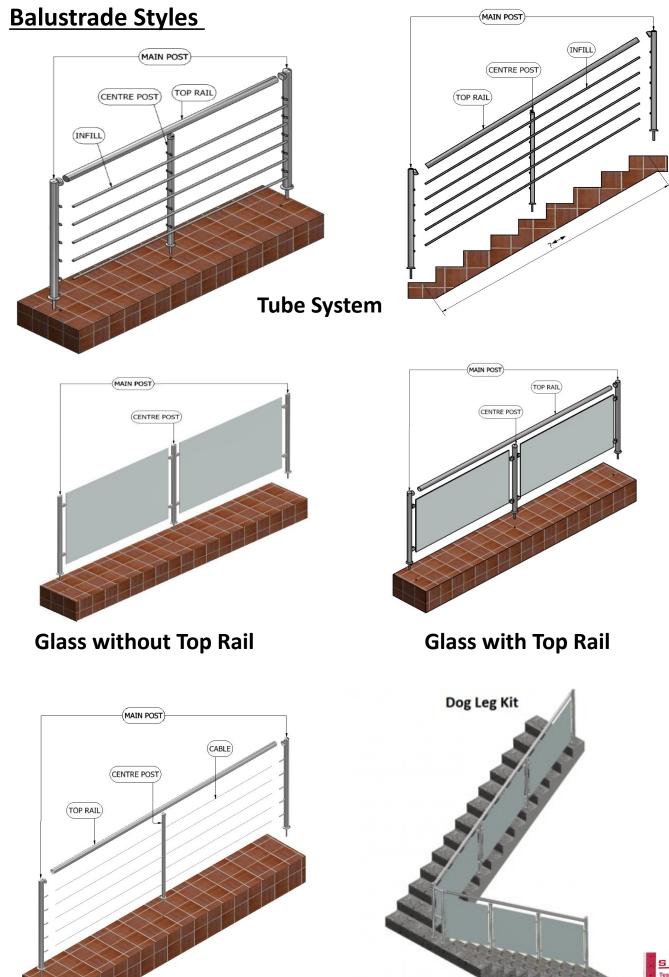

Cable

SABS Tested Approved



## Measure Up.

Measure up your area where you intend placing your balustrade system.

Your measurements do not have to be exact, as your post placement may differ .

Once your main posts are placed, you will proceed to cut top rail to size & connect to post.


We supply 6meter lengths, optimize your material to get max usage. Use your diagram and layout during the install phase.

From your drawing pad order, important to use separate area pages, factory supplies your order per area, to minimise errors.

### Site drawing layout




#### System Assembly Line drawing layout

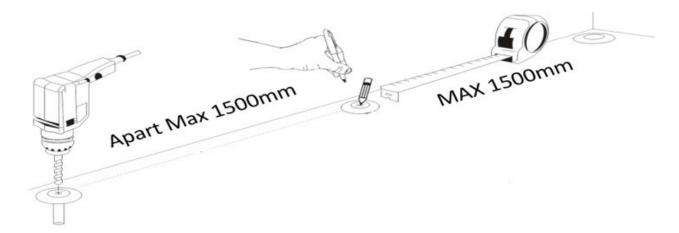


<u>Top View line drawing,</u> Simple layout drawing to see your configurations and item requirements

- End /90/180 Posts
  Centre Posts
- 3. Centre Line

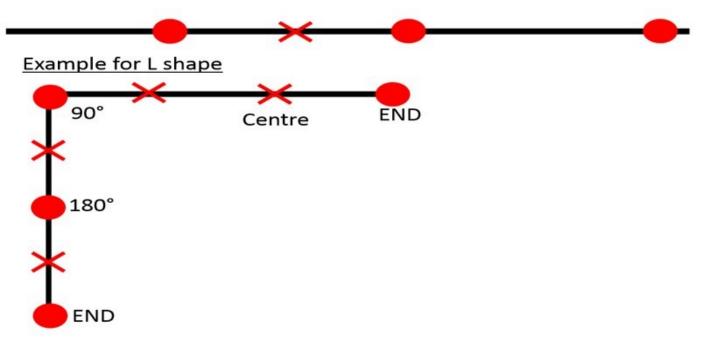


- 1. Mark evenly spaced holes between the posts
- 2. Place centre (support) posts at equal centres not more than 1,5m apart.
- 3. Recommended about 1,2m apart.
- 4. Make sure your line is centre from end to end. Use a chalk line.

#### **Posts Layout**

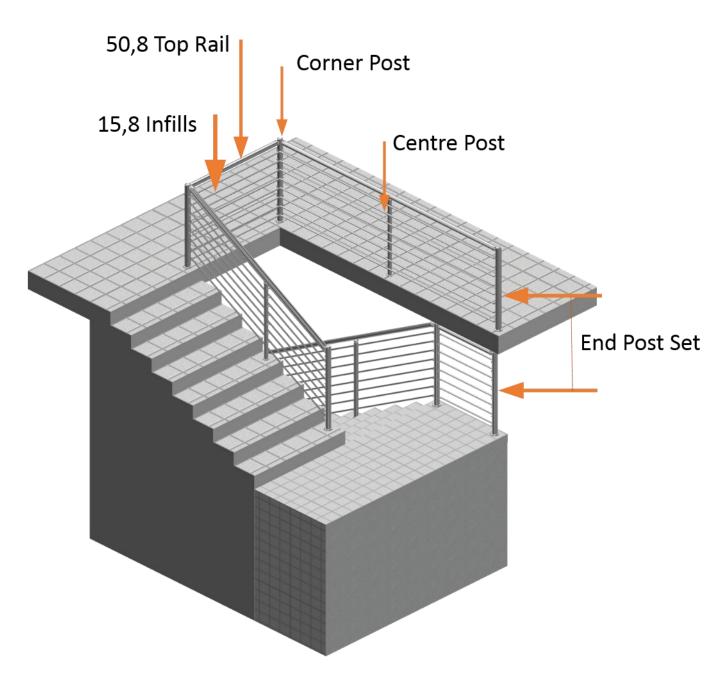


Example of line drawing & bill of materials

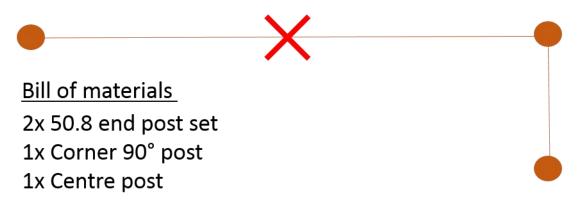

#### Before proceeding to assemble your system:



We strongly recommend 1,2 mtr maximum span between supporting posts, This will strengthen tube infill's. This information and recommendation is only a recommendation. Please make contact with our technical support office if in doubt.

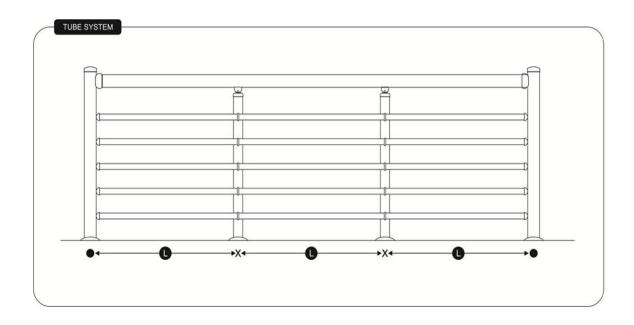


#### Before proceeding to assemble your system:


Recommend width of glass for outdoor use depending on wind factor, type, thickness will determine your spacing. Maximum span between supporting posts is determined by glass type and glass thickness.





**Toughened safety glass is strongly recommended**. Glass Balustrades is applied by two edge support system this information and recommendation is only a recommendation. Please make contact with our technical support office if in doubt.

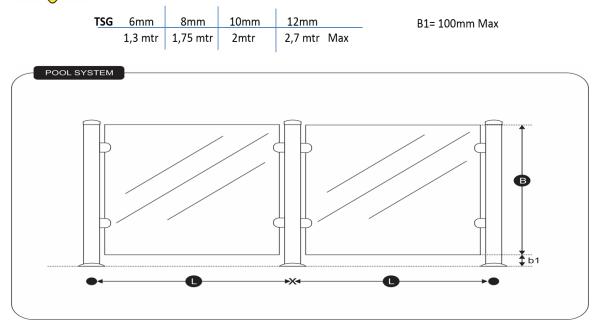



## Measure and Layout

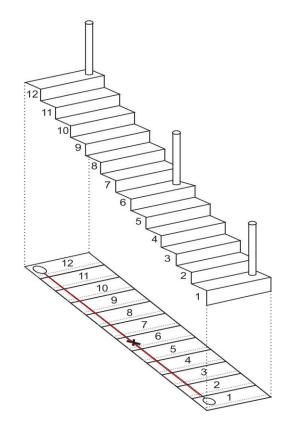


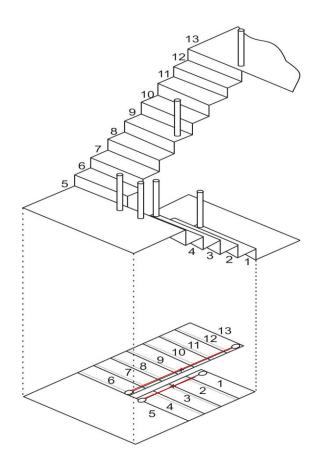

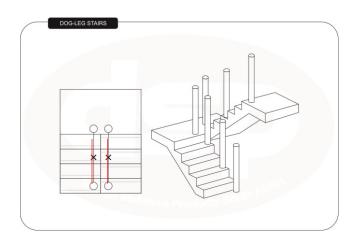








### Balcony





### **Top Rail connection**





## **In-Fill connection**

